




Contractor's Guide to **Green** Building Construction

MANAGEMENT, PROJECT DELIVERY, DOCUMENTATION,
AND RISK REDUCTION

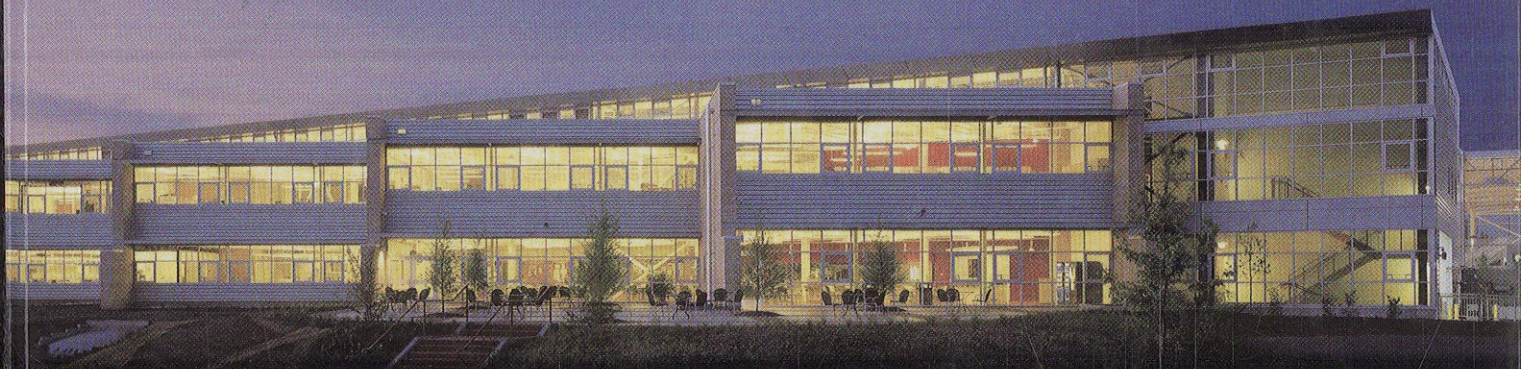

Building Your Quality of Life

Published in cooperation with
The Associated General Contractors of America

Thomas E. Glavinich
Foreword by Thomas A. Taylor

Contents

Foreword	xv
Preface	xix
Acknowledgments	xxiii
CHAPTER 1. GREEN CONSTRUCTION AND THE CONTRACTOR	1
1.1 Introduction	1
1.2 Sustainable Development: What is it?	2
1.3 Green Building Defined	2
1.4 Green Construction: Reactive or Proactive?	3
1.5 Green Construction without Green Design?	4
1.6 What is Green Construction?	5
1.7 Green is Lean	5
1.8 The Green Contractor	6
1.9 Advantages of being Green	6
1.10 Overview of this Book	6
1.11 Case Studies	9
1.12 References	13
CHAPTER 2. ELEMENTS OF GREEN CONSTRUCTION	15
2.1 Introduction	15
2.2 Green Building Evaluation Systems	16
2.3 LEED™ Certification	17
2.3.1 U.S. Green Building Council	17
2.3.2 LEED™ Rating Systems	18

2.3.3	LEED™-NC Certification Process	19
2.3.4	Information on the LEED™ Rating System	23
2.3.5	Projects, Not Products, Are LEED™ Certified	23
2.3.6	LEED™-Accredited Professionals	24
2.4	Green Globes™ Certification	24
2.4.1	Origins of Green Globes™	24
2.4.2	Green Building Initiative	25
2.4.3	Green Globes™ Rating System	25
2.4.4	Green Globes™ Self-Assessment	27
2.4.5	Green Globes™ Certification	27
2.4.6	Green Globes™ Verification Process	29
2.4.7	Information on the Green Globes™ Rating System	29
2.5	Additional Rating Systems	30
2.6	Case Study	30
2.7	References	32
CHAPTER 3. UNDERSTANDING GREEN PROJECT REQUIREMENTS		33
3.1	Introduction	33
3.2	Impact of Green Requirements	33
3.3	Green Project Delivery	34
3.3.1	Importance of Green Project Delivery	34
3.3.2	What Is a Project Delivery System?	35
3.3.3	Project Delivery System Categories	36
3.4	Green Design-Bid-Build	37
3.5	Green Construction Manager At-Risk	38
3.6	Green Design-Build	39
3.6.1	Design-Build Overview	39
3.6.2	One-Stage Design-Build Process	40
3.6.3	Two-Stage Design-Build Process	40
3.6.4	Design-Build Variations	41
3.6.5	Managing the Green Design Process	42
3.7	Contractor Selection Methods	42
3.7.1	Price-Based Selection	42
3.7.2	Qualifications-Based Selection	43
3.7.3	Best-Value Selection	43
3.8	Green Scope of Work Impact	44
3.9	Identifying Green Requirements	44
3.10	Specifications	44
3.10.1	Specifications Defined	44

3.10.2	Specification Types	45
3.10.3	Conflicting Green Specifications	47
3.10.4	Mixed Green Specifications	47
3.11	CSI MasterFormat™	48
3.11.1	CSI MasterFormat™ Background	48
3.11.2	2004 MasterFormat™ Groups	48
3.11.3	General Requirements Subgroup—Division 01	49
3.11.4	Facility Construction Subgroup	52
3.11.5	Facility Services Subgroup	53
3.11.6	1995 CSI MasterFormat™ References	53
3.11.7	A Word of Caution	54
3.12	Green Requirements on Drawings	54
3.13	Case Study	55
3.14	References	57

CHAPTER 4. CONTRACTING FOR GREEN CONSTRUCTION 59

4.1	Introduction	59
4.2	Consult Your Advisors	59
4.3	Contract Purpose	60
4.4	Where is the Risk?	60
4.5	Managing Green Construction Risk	61
4.5.1	Risk Retention	61
4.5.2	Risk Reduction	62
4.5.3	Risk Transfer	63
4.5.4	Risk Avoidance	64
4.6	Owner-Contractor Agreement	64
4.6.1	Conditions of Contract	65
4.6.2	Drawings and Specifications	68
4.6.3	Addenda	69
4.6.4	Other Listed Documents	69
4.7	Green Design-Build Requirements	70
4.7.1	Design-Build Project Delivery	70
4.7.2	Contract Documents	70
4.7.3	Design-Build Risk	70
4.7.4	Establish Measurable Design-Build Performance Requirements	71
4.8	Order of Contract Document Precedence	72
4.9	Insurance Coverage on Green Projects	73
4.10	Bonding Requirements on Green Projects	73

4.11	Case Study	73
4.12	References	76
CHAPTER 5. MANAGING GREEN DESIGN		77
5.1	Introduction	77
5.2	Designer Defined	77
5.3	Design-Build as a Project Delivery System	78
5.4	Design-Builder Defined	78
5.5	Design-Build is a Team Effort	79
5.5.1	Relationship between Contractor and Designer	79
5.5.2	Designer Organization	79
5.6	What Makes a Successful Design-Build Project?	80
5.7	Understanding Owner Needs and Expectations	81
5.7.1	Owner Needs and Expectations	81
5.7.2	Owner's Project Criteria	82
5.7.3	Owner's Project Criteria as a Contract Document	83
5.7.4	Importance of Measurable Green Criteria	83
5.7.5	Establishing Measurable Green Criteria	85
5.7.6	Beware of Hidden Green Requirements and Conflicts	86
5.7.7	Basis for Commissioning Plan	86
5.8	Selecting a Designer	87
5.8.1	Need for a Designer	87
5.8.2	Defining the Design Firm's Scope of Services	87
5.8.3	Identifying and Selecting a Designer	87
5.8.4	Professional Qualifications	90
5.9	Contracting with the Designer	91
5.9.1	Design Contract Scope	91
5.9.2	Design Contract Requirements	91
5.9.3	Design Contract Format	92
5.9.4	Use of Purchase Orders	92
5.9.5	Alignment between Agreements	93
5.10	Professional Liability Insurance	93
5.10.1	Professional Liability Insurance Overview	93
5.10.2	Need for Professional Liability Insurance	94
5.10.3	Insurance Coverage Period	94
5.10.4	Example Contractual Requirement for Professional Liability Insurance	96

5.11	The Design Process	96
5.11.1	Six Design Phases	96
5.11.2	Use of the Design Phases	98
5.12	Perform Regular Design Reviews	99
5.12.1	Need for Regular Design Reviews	99
5.12.2	Types of Design Reviews	99
5.13	Managing the Design Process	100
5.13.1	Establishing Design Documentation Requirements	100
5.13.2	Design Change and Modification Procedure	101
5.13.3	Plan and Schedule the Design Process	101
5.14	Case Study	101
5.15	References	106

CHAPTER 6. GREEN SUBCONTRACTING 109

6.1	Introduction	109
6.2	Green Subcontracting	109
6.3	Why are Subcontractors Important on Green Projects?	111
6.4	Specialty Contractor Prequalification	112
6.5	Defining Subcontractor Scope	114
6.6	Basis for Green Scope of Work	115
6.7	Establishing Green Criteria	116
6.8	Green Processes and Procedures	116
6.9	Educate Specialty Contractors	117
6.10	Subcontractor Selection	117
6.11	Subcontract Terms and Conditions	119
6.11.1	Current Model Contract Documents	119
6.11.2	Subcontract Documents	119
6.11.3	Green Flow-Through Requirements	119
6.11.4	Implicit Green Requirements	120
6.11.5	Subcontractor Green Submittals	121
6.11.6	Subcontractor Design Management Responsibilities	122
6.11.7	System Startup and Commissioning	123
6.11.8	Early Startup of Building Systems	123
6.12	Training Subcontractors On-Site	124
6.13	Case Study	125
6.14	References	129

CHAPTER 7. GREEN PROCUREMENT	131
7.1 Introduction	131
7.2 Building Product Life Cycle	131
7.2.1 Raw Material Extraction/Harvesting	131
7.2.2 Raw Material Transport	133
7.2.3 Raw Material Conversion	134
7.2.4 Converted Material Transport	134
7.2.5 Product Manufacture	134
7.2.6 Product Transport	134
7.2.7 Building Product Installation	134
7.2.8 Building Product Use	135
7.2.9 Building Product Removal	135
7.2.10 Building Product Disposition	135
7.2.11 Transport Salvaged Product	136
7.2.12 Refurbish Product	136
7.2.13 Transport Refurbished Product	137
7.2.14 Recover Material	137
7.2.15 Transport Recovered Material	137
7.2.16 Landfill/Incinerate Waste	137
7.3 Where are the Green Building Product Requirements?	138
7.3.1 Specific Requirements	138
7.3.2 General Performance Requirements	138
7.3.3 Partial Performance Requirements	139
7.3.4 Need to Understand Green Building Product Requirements	139
7.4 Subcontractor Procurement Responsibility	139
7.5 Green Building Product Characteristics	140
7.5.1 Resource Efficiency	140
7.5.2 Waste Minimization	143
7.5.3 Indoor Air Quality	145
7.5.4 Energy Efficiency	146
7.5.5 Water Conservation	146
7.6 Green Building Product Screening Process	146
7.6.1 Step 1: Research	147
7.6.2 Step 2: Evaluate	147
7.6.3 Step 3: Select	147
7.7 Green Procurement Process	147
7.7.1 Green Building Product Requirements Analysis	148
7.7.2 Supplier RFQ Development	151

7.7.3	Product Procurement Process	156
7.7.4	Establish a Procurement Procedure	159
7.8	Case Study	159
7.9	References	162

CHAPTER 8. CONSTRUCTING A GREEN PROJECT 163

8.1	Introduction	163
8.2	Green Construction Process	163
8.3	Green Construction Planning and Scheduling	165
8.4	Workforce Conservation	166
8.4.1	Need to Conserve the Workforce	166
8.4.2	Safety	166
8.4.3	Ergonomics	167
8.4.4	Use of Local Workforce	167
8.5	Material Conservation	167
8.5.1	Material Conservation Planning	168
8.5.2	Material Conservation Strategies	168
8.6	Site Layout and Use	171
8.6.1	Set Construction Boundaries	172
8.6.2	Restrict Vehicle and Equipment Movement	172
8.6.3	Establish Trailer, Storage, and Laydown Areas	173
8.6.4	Prevent Site Erosion and Sediment Runoff	173
8.6.5	Manage Stormwater and Wastewater	173
8.7	Construction Waste Management	174
8.8	Material Storage and Protection	175
8.9	Providing a Healthy Work Environment	176
8.10	Creating an Environmentally Friendly Jobsite	178
8.11	Construction Equipment Selection and Operation	179
8.12	Documenting Green Construction	180
8.13	Case Study	182
8.14	References	188

CHAPTER 9. GREEN PROJECT COMMISSIONING AND CLOSEOUT 189

9.1	Introduction	189
9.2	Building Commissioning Purpose and Objectives	189
9.3	Building Commissioning Defined	190
9.4	Owner Building Commissioning Benefits	190
9.4.1	Verified Equipment and System Operation	191
9.4.2	Established Baseline System Performance	192

9.4.3	Reduced Operating Costs	192
9.4.4	Improved Occupant Well-Being	193
9.4.5	Increased System Reliability and Maintainability	193
9.5	Commissioning as a Quality Assurance Program	193
9.5.1	Contractor Building Commissioning Benefits	193
9.5.2	What is Quality?	194
9.5.3	Quality Control	194
9.5.4	Quality Assurance	195
9.5.5	Quality Planning	195
9.6	Contractor's Responsibility for Building Performance	196
9.6.1	Importance of Understanding Responsibility for Building Performance	196
9.6.2	Determining Responsibility for Building Performance	196
9.7	Building Commissioning Extent and Timing	199
9.8	Project Commissioning Requirements	199
9.8.1	Contractor Needs to Understand Commissioning Requirements	200
9.8.2	Defining Subcontractor Scopes of Work	200
9.8.3	1995 CSI MasterFormat™	201
9.8.4	2004 CSI MasterFormat™	202
9.8.5	Division 25—Integrated Automation	203
9.9	Basic Building Commissioning Process	206
9.9.1	Equipment Commissioning	206
9.9.2	Subsystem Commissioning	206
9.9.3	System Commissioning	207
9.9.4	Integrated Systems Commissioning	207
9.9.5	Building Commissioning	208
9.10	Commissioning Authority	208
9.10.1	What is the Commissioning Authority's Role?	208
9.10.2	Who Can Be the Commissioning Authority?	208
9.10.3	Contractor as Commissioning Authority	210
9.10.4	Commissioning Authority Qualifications	210
9.10.5	Commissioning Authority Responsibilities	211
9.11	Commissioning Plan	212
9.12	Commissioning Team	212
9.13	Commissioning Activities	214
9.13.1	Prefunctional Equipment Testing	214
9.13.2	Control System Checkout and Testing	217

9.13.3	Testing, Adjusting, and Balancing	217
9.13.4	Functional Testing	218
9.13.5	Operational Training	219
9.13.6	Commissioning and Closeout Submittals	220
9.14	Project Functional Completion	220
9.15	Working with an Outside Commissioning Authority	221
9.15.1	Contractor Interaction with Outside Commissioning Authority	221
9.15.2	Understand the Commissioning Requirements	222
9.15.3	Subcontractor Commissioning Requirements	223
9.15.4	Interaction with the Commissioning Authority	223
9.15.5	Finalizing the Commissioning Plan	224
9.15.6	Ongoing Commissioning Authority Interaction	224
9.15.7	Equipment and System Documentation and Submittals	224
9.15.8	Create a Commissioning File	225
9.15.9	Preparation and Submission of O&M Manuals	226
9.16	Case Study	228
9.17	References	231
APPENDIX A. GLOSSARY OF GREEN TERMS AND ABBREVIATIONS		233
	References	248
APPENDIX B. REFERENCES AND ADDITIONAL INFORMATION		249
	Green Building Organizations and Rating Systems	249
	The Associated General Contractors of America	250
	The Construction Specifications Institute	250
	Sheet Metal and Air Conditioning Contractors' Association, Inc.	250
	Glossaries of Terms, Abbreviations, and Acronyms	251
	Select Material and Equipment Standards and Listing	251
	Select Green Building Studies	252
	Select Building Commissioning Guides and Specifications	252
	Select Green Building Web Sites	252
	Select Books on Green Building Design and Estimating	253
	Select Green Building Periodicals and Newsletters	253
Index		255