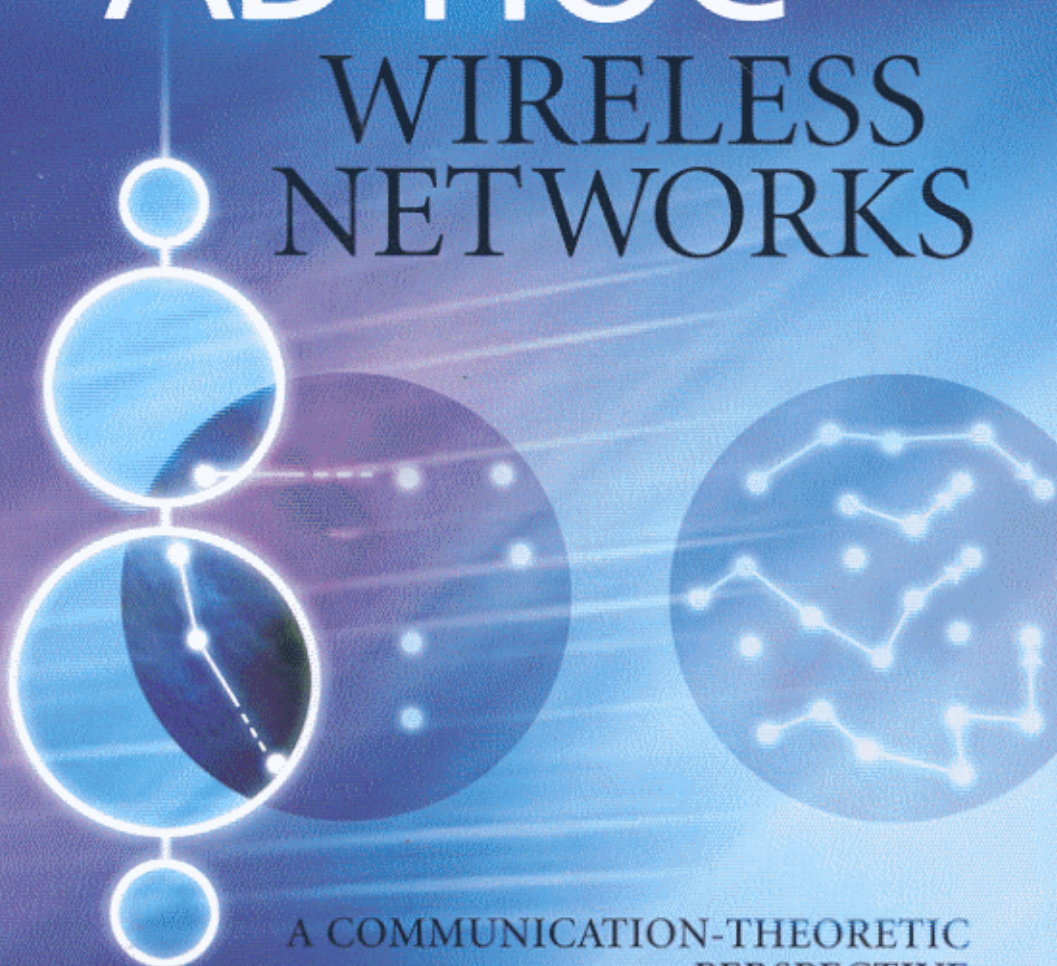


OZAN K. TONGUZ AND GIANLUIGI FERRARI

AD HOC WIRELESS NETWORKS

An abstract graphic on the left side of the cover features a vertical chain of four circles. The top and bottom circles are small and light blue. The middle two are larger and overlap each other, with the top one being light blue and the bottom one being dark blue. To the right of this chain are two large, semi-transparent circles. The left one is dark blue and contains a network of white nodes and lines. The right one is light blue and also contains a network of white nodes and lines. Faint, glowing lines radiate across the background, suggesting a network or signal transmission.

A COMMUNICATION-THEORETIC
PERSPECTIVE

Companion Website

 WILEY

Contents

| | |
|---|-------------|
| Preface | xiii |
| List of Acronyms | xv |
| 1 Related Work and Preliminary Considerations | 1 |
| 1.1 Introduction | 1 |
| 1.2 Related Work | 2 |
| 1.2.1 A Routing-Based Approach | 2 |
| 1.2.2 An Information-Theoretic Approach | 3 |
| 1.2.3 A Dynamic Control Approach | 4 |
| 1.2.4 A Game-Theoretic Approach | 4 |
| 1.3 A New Perspective for the Design of Ad Hoc Wireless Networks | 5 |
| 1.4 Overview of the Underlying Assumptions in the Following Chapters | 9 |
| 1.5 The Main Philosophy Behind the Book | 11 |
| 2 A Communication-Theoretic Framework for Multi-hop Ad Hoc Wireless Networks: Ideal Scenario | 15 |
| 2.1 Introduction | 15 |
| 2.2 Preliminaries | 16 |
| 2.2.1 Topology | 16 |
| 2.2.2 Route Discovery | 17 |
| 2.2.3 Average Number of Hops | 18 |
| 2.3 Communication-Theoretic Basics | 18 |
| 2.3.1 Bit Error Rate at the End of a Multi-hop Route | 18 |
| 2.3.2 Link Signal-to-Noise Ratio | 20 |
| 2.4 BER Performance Analysis | 23 |
| 2.4.1 Uncoded Transmission | 23 |
| 2.4.2 Coded Transmission | 27 |
| 2.5 Network Behavior | 29 |
| 2.5.1 Minimum Spatial Energy Density and Minimum Transmit Power for Full Connectivity | 30 |
| 2.5.2 Connectivity: Average Sustainable Number of Hops | 34 |
| 2.5.3 Lifetime of a Node | 40 |
| 2.6 Concluding Remarks | 41 |

| | | |
|----------|---|------------|
| 3 | A Communication-Theoretic Framework for Multi-hop Ad Hoc Wireless Networks: Realistic Scenario | 43 |
| 3.1 | Introduction | 43 |
| 3.2 | Preliminaries | 44 |
| 3.3 | Communication-Theoretic Basics | 46 |
| 3.4 | Inter-node Interference | 48 |
| 3.4.1 | Geometric Considerations | 48 |
| 3.4.2 | Traffic Model | 49 |
| 3.5 | RESGO MAC Protocol | 50 |
| 3.5.1 | Scenario with Strong LOS and Interference from Nodes in Tier 1 | 50 |
| 3.5.2 | Scenario with Strong LOS and Interference from Nodes in Tiers 1 and 2 | 57 |
| 3.5.3 | Scenario with Strong Multipath (Rayleigh Fading) | 58 |
| 3.5.4 | Discussion | 63 |
| 3.6 | RESLIGO MAC Protocol | 64 |
| 3.6.1 | Scenario with Strong LOS | 66 |
| 3.6.2 | Scenario with Strong Multipath (Rayleigh Fading) | 69 |
| 3.6.3 | Discussion | 72 |
| 3.7 | Network Behavior | 73 |
| 3.7.1 | Minimum Spatial Energy Density and Minimum Transmit Power for Full Connectivity | 73 |
| 3.7.2 | Scenario with Strong LOS | 73 |
| 3.7.3 | Scenario with Strong Multipath (Rayleigh Fading) | 75 |
| 3.7.4 | Connectivity: Average Sustainable Number of Hops | 78 |
| 3.8 | Conclusions | 83 |
| 4 | Connectivity in Ad Hoc Wireless Networks: A Physical Layer Perspective | 85 |
| 4.1 | Introduction | 85 |
| 4.2 | Quasi-regular Topology | 86 |
| 4.2.1 | A Formal Definition of Quasi-regular Topology | 87 |
| 4.2.2 | A Communication-Theoretic Approach | 88 |
| 4.2.3 | What Happens if Each Node has Two Spatial Neighbors? | 93 |
| 4.2.4 | What Happens if There is Inter-node Interference? | 96 |
| 4.3 | Random Topology | 100 |
| 4.3.1 | Related Work | 100 |
| 4.3.2 | Connectivity in Ad Hoc Wireless Networks with Random Topology | 102 |
| 4.3.3 | Evaluation of the Likelihood of Broadcast Percolation | 104 |
| 4.3.4 | What Happens if There is Inter-node Interference? | 108 |
| 4.4 | Concluding Remarks and Discussion | 109 |
| 5 | Effective Transport Capacity in Ad Hoc Wireless Networks | 111 |
| 5.1 | Introduction | 111 |
| 5.2 | Model and Assumptions | 113 |
| 5.3 | Preliminaries | 115 |
| 5.3.1 | Route Bit Error Rate | 115 |
| 5.3.2 | Link Signal-to-Noise Ratio | 115 |
| 5.3.3 | Average Sustainable Number of Hops | 117 |
| 5.4 | Single-Route Effective Transport Capacity | 117 |

| | | |
|----------|--|------------|
| 5.5 | Aggregate Effective Transport Capacity | 120 |
| 5.5.1 | Ideal (no INI) Case | 121 |
| 5.5.2 | Realistic (INI) Case: RESGO MAC Protocol | 123 |
| 5.5.3 | Realistic (INI) Case: RESLIGO MAC Protocol | 128 |
| 5.6 | Comparison of the RESGO and RESLIGO MAC Protocols | 131 |
| 5.7 | Spread-RESGO: Improved RESGO MAC Protocol with Per-route Spreading Codes | 134 |
| 5.8 | Discussion | 138 |
| 5.9 | Concluding Remarks | 141 |
| 6 | Impact of Mobility on the Performance of Multi-hop Ad Hoc Wireless Networks | 143 |
| 6.1 | Introduction | 143 |
| 6.2 | Preliminaries | 144 |
| 6.2.1 | Ideal (no INI) Case | 147 |
| 6.2.2 | Realistic (INI) Case | 147 |
| 6.3 | Switching Models | 149 |
| 6.3.1 | Opportunistic Non-reservation-Based Switching | 149 |
| 6.3.2 | Reservation-Based Switching | 150 |
| 6.4 | Mobility Models | 150 |
| 6.4.1 | Direction-Persistent Mobility Model | 150 |
| 6.4.2 | Direction-Non-persistent (DNP) Mobility Model | 155 |
| 6.5 | Numerical Results | 157 |
| 6.5.1 | Direction-Persistent Mobility Model | 157 |
| 6.5.2 | Direction-Non-persistent Mobility Model | 161 |
| 6.6 | Conclusions | 163 |
| 7 | Route Reservation in Ad Hoc Wireless Networks | 167 |
| 7.1 | Introduction | 167 |
| 7.2 | Related Work | 168 |
| 7.3 | Network Models and Assumptions | 169 |
| 7.3.1 | Network Topology | 169 |
| 7.3.2 | Typical Routes | 170 |
| 7.3.3 | Bit Error Rate at the End of a Multi-hop Route | 170 |
| 7.3.4 | Retransmission Model | 172 |
| 7.3.5 | Mobility | 172 |
| 7.4 | The Two Switching Schemes | 173 |
| 7.4.1 | Reservation-Based Switching | 173 |
| 7.4.2 | Non-reservation-Based Switching | 175 |
| 7.5 | Analysis of the Two Switching Techniques | 176 |
| 7.5.1 | Reservation-Based Switching | 176 |
| 7.5.2 | Non-reservation-Based Switching | 179 |
| 7.6 | Results and Discussion | 182 |
| 7.6.1 | Switching Scheme and Traffic Load | 182 |
| 7.6.2 | Effects of Interference | 183 |
| 7.6.3 | Effects of the Number of Simultaneously Active Disjoint Routes | 188 |
| 7.6.4 | Effects of Node Spatial Density | 189 |

| | | |
|----------|---|------------|
| 7.6.5 | Effects of Mobility | 191 |
| 7.6.6 | Implications on Practical Scenarios | 192 |
| 7.7 | Concluding Remarks | 193 |
| 8 | Optimal Common Transmit Power for Ad Hoc Wireless Networks | 195 |
| 8.1 | Introduction | 195 |
| 8.2 | Model and Assumptions | 196 |
| 8.2.1 | Network Topology | 196 |
| 8.2.2 | Routing | 197 |
| 8.2.3 | Medium Access Control Protocol | 199 |
| 8.3 | Connectivity | 199 |
| 8.3.1 | Square Grid Topology | 200 |
| 8.3.2 | Two-Dimensional Poisson Topology | 201 |
| 8.4 | BER at the End of a Multi-hop Route | 202 |
| 8.4.1 | Square Grid Topology | 202 |
| 8.4.2 | Random Topology | 204 |
| 8.5 | Optimal Common Transmit Power | 204 |
| 8.5.1 | Optimal Common Transmit Power for Networks with Square Grid Topology | 204 |
| 8.5.2 | Optimal Common Transmit Power for Networks with Random Topology | 205 |
| 8.6 | Performance Metrics | 205 |
| 8.6.1 | Node and Network Lifetime | 205 |
| 8.6.2 | Effective Transport Capacity | 206 |
| 8.7 | Results and Discussion | 208 |
| 8.7.1 | Optimal Transmit Power and Data Rate | 208 |
| 8.7.2 | Optimal Transmit Power and Node Spatial Density | 210 |
| 8.7.3 | Effects of Strong Propagation Path Loss | 211 |
| 8.7.4 | Connectivity Robustness to Node Spatial Density Changes | 213 |
| 8.7.5 | Practical Determination of the Optimal Transmit Power | 215 |
| 8.8 | Related Work | 216 |
| 8.9 | Conclusions | 217 |
| 9 | The Routing Problem in Ad Hoc Wireless Networks: A Cross-Layer Perspective | 219 |
| 9.1 | Introduction | 219 |
| 9.2 | Experimental Evidence | 220 |
| 9.3 | Preliminaries: Analytical Models and Assumptions | 221 |
| 9.3.1 | Physical Layer | 221 |
| 9.3.2 | Medium Access Control | 225 |
| 9.3.3 | Basic Networking Assumptions | 226 |
| 9.4 | Route Selection: Simulation Study | 227 |
| 9.4.1 | Network Topology | 227 |
| 9.4.2 | BER-Based Routing versus Shortest-Path Routing | 227 |
| 9.5 | Network Performance Evaluation | 235 |
| 9.5.1 | Average Hop Length Models | 235 |
| 9.5.2 | Retransmission Model | 239 |

- 9.5.3 Packet Error Rate 239
- 9.5.4 Delay 240
- 9.6 Discussion 243
 - 9.6.1 Cross-layer Routing: A Practical Perspective 243
 - 9.6.2 Mobility 246
- 9.7 Related Work 246
- 9.8 Conclusions 248

- 10 Concluding Remarks 249**
 - 10.1 Introduction 249
 - 10.2 Extensions of the Theoretical Framework: Open Problems 249
 - 10.2.1 Performance of Ad Hoc Wireless Networks: Random Versus Uniform Topologies 249
 - 10.2.2 Impact of Clustering on the BER Performance in Ad Hoc Wireless Networks 251
 - 10.2.3 Impact of Receiver Sensitivity on the Performance of Ad Hoc Wireless Networks 253
 - 10.2.4 Spectral Efficiency–Connectivity Tradeoff in Ad Hoc Wireless Networks 254
 - 10.2.5 MIMO-OFDM Wireless Communications 256
 - 10.2.6 Smart Antennas and Directional Antennas 256
 - 10.3 Network Architectures 256
 - 10.4 Network Application Architectures 257
 - 10.5 Standards 258
 - 10.6 Applications 263
 - 10.7 Conclusions 264

- Appendix A Analysis of the Inter-node Interference 265**
 - A.1 Introduction 265
 - A.2 Exact Computation of the Average Link BER in a Scenario with Strong LOS 265
 - A.2.1 Interference from Nodes in Tier 1 266
 - A.2.2 Interference from Nodes in Tiers 1 and 2 271
 - A.2.3 Interference from Nodes in Tier 2 273
 - A.2.4 Simulation Scenario 274
 - A.3 Exact Computation of the Average Link BER in a Scenario with Strong Multipath (Rayleigh Fading) 276
 - A.3.1 Interference from Nodes in Tier 1 277
 - A.3.2 Interference from Nodes in Tiers 1 and 2 278
 - A.3.3 Interference from Nodes in Tiers 1, 2 and 3 278
 - A.4 LOS and Multipath (Rice Fading) 280
 - A.5 Gaussian Assumption for the Interference Noise 280
 - A.5.1 Route Bit Error Rate 282
 - A.5.2 Interference Power 284

- Appendix B Proof of Theorem 1, Chapter 5 287**

- Appendix C Route Discovery 293**

| | | |
|-------------------|--|------------|
| Appendix D | Validation of Analytical Results | 295 |
| D.1 | Validation of Network Goodput | 295 |
| D.2 | Validation of Delay | 295 |
| D.3 | Validation of Average Number of Simultaneously Active Routes | 297 |
| Appendix E | Derivation of Joint CDF of W and Φ | 299 |
| References | | 307 |
| Index | | 327 |