


POWER-SWITCHING CONVERTERS

Medium and High Power



By Dorin O. Neacsu

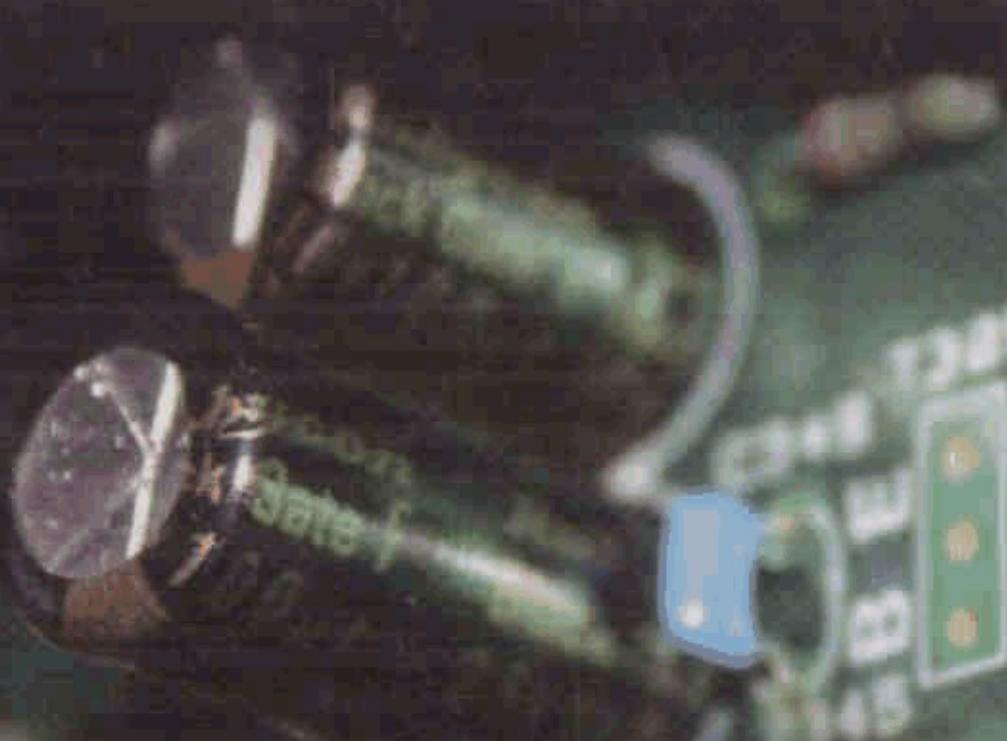

Taylor & Francis
Taylor & Francis Group

Table of Contents

| | | |
|------------------|---|----|
| Chapter 1 | Introduction to Medium- and High-Power Switching Converters | 1 |
| 1.1 | Market for Medium- and High-Power Converters | 1 |
| 1.2 | Adjustable Speed Drives | 6 |
| 1.2.1 | AC/DC Converter | 6 |
| 1.2.2 | Intermediate Circuit | 7 |
| 1.2.3 | DC Capacitor Bank | 8 |
| 1.2.4 | Soft-Charge Circuit | 8 |
| 1.2.5 | DC Reactor | 9 |
| 1.2.6 | Brake Circuit | 9 |
| 1.2.7 | Three-Phase Inverter | 10 |
| 1.2.8 | Protection Circuits | 10 |
| 1.2.9 | Sensors | 10 |
| 1.2.10 | Motor Connection | 10 |
| 1.2.11 | Controller | 11 |
| 1.3 | Grid Interfaces or Distributed Generation | 12 |
| 1.3.1 | Grid Harmonics | 13 |
| 1.3.2 | Power Factor | 13 |
| 1.3.3 | DC Current Injection | 13 |
| 1.3.4 | Electro-Magnetic Compatibility and Electro- Magnetic Inference | 14 |
| 1.3.5 | Frequency and Voltage Variations | 15 |
| 1.3.6 | Maximum Power Connected at Low-Voltage Grid | 15 |
| 1.4 | Multi-Converter Power Electronic Systems | 16 |
| 1.5 | Conclusion | 17 |
| | References | 17 |
| Chapter 2 | High-Power Semiconductor Devices | 19 |
| 2.1 | A View of the Power Semiconductor Market | 19 |
| 2.2 | Power MOSFETs | 21 |
| 2.2.1 | Operation | 21 |
| 2.2.2 | Control | 26 |
| 2.3 | Insulated Gate Bipolar Transistors | 27 |
| 2.3.1 | Operation | 27 |
| 2.3.2 | Control, Gate-Drivers | 28 |
| 2.3.3 | Protection | 30 |

| | | |
|------------------|---|-----------|
| 2.3.4 | Power Loss Estimation | 31 |
| 2.3.5 | Active Gate-Drivers | 33 |
| 2.4 | Gate Turn-Off Thyristors | 36 |
| 2.5 | Advanced Power Devices | 36 |
| 2.6 | Problems | 37 |
| | References | 37 |
| Chapter 3 | Basic Three-Phase Inverters | 39 |
| 3.1 | High-Power Devices Operated as Simple Switches | 39 |
| 3.2 | Inverter Leg with Inductive Load Operation | 40 |
| 3.3 | What Is a PWM Algorithm? | 41 |
| 3.4 | Basic Three-Phase Voltage Source Inverter: Operation and Functions | 44 |
| 3.5 | Performance Indices: Definitions and Terms Used in Different Countries | 49 |
| 3.5.1 | Frequency Analysis | 49 |
| 3.5.2 | Modulation Index for Three-Phase Converters | 55 |
| 3.5.3 | Performance Indices | 55 |
| 3.5.3.1 | Content in Fundamental (z) | 55 |
| 3.5.3.2 | Total Harmonic Distortion (THD) Coefficient | 55 |
| 3.5.3.3 | Harmonic Current Factor (HCF) | 55 |
| 3.5.3.4 | Current Distortion Factor | 57 |
| 3.6 | Direct Calculation of Harmonic Spectrum from Inverter Waveforms | 57 |
| 3.6.1 | Decomposition in Quasi-Rectangular Waveforms | 58 |
| 3.6.2 | Vectorial Method | 59 |
| 3.7 | Preprogrammed PWM for Three-Phase Inverters | 60 |
| 3.7.1 | Preprogrammed PWM for Single-Phase Inverter | 61 |
| 3.7.2 | Preprogrammed PWM for Three-Phase Inverter | 64 |
| 3.7.3 | Binary-Programmed PWM | 66 |
| 3.8 | Modeling a Three-Phase Inverter with Switching Functions | 67 |
| 3.9 | Braking Leg in Power Converters for Motor Drives | 68 |
| 3.10 | DC Bus Capacitor within an AC/DC/AC Power Converter | 69 |
| 3.11 | Conclusion | 72 |
| 3.12 | Problems | 72 |
| | References | 73 |
| Chapter 4 | Carrier-Based Pulse Width Modulation and Operation Limits | 75 |
| 4.1 | Carrier-Based Pulse Width Modulation Algorithms: Historical Importance | 75 |
| 4.2 | Carrier-Based PWM Algorithms with Improved Reference | 77 |

| | | |
|-------|---|-----|
| 4.3 | PWM Used within Volt/Hertz Drives: Choice of Number of Pulses Based on the Desired Current Harmonic Factor | 83 |
| 4.3.1 | Operation in the Low-Frequencies Range (Below Nominal Frequency) | 84 |
| 4.3.2 | High Frequencies (>60 Hz) | 86 |
| 4.4 | Implementation of Harmonic Reduction with Carrier PWM | 86 |
| 4.5 | Limits of Operation: Minimum Pulse Width | 89 |
| 4.5.1 | Avoiding Pulse Dropping by Harmonic Injection | 95 |
| 4.6 | Limits of Operation | 101 |
| 4.6.1 | Deadtime | 101 |
| 4.6.2 | Zero Current Clamping | 105 |
| 4.6.3 | Overmodulation | 106 |
| | 4.6.3.1 Voltage Gain Linearization | 107 |
| 4.7 | Conclusion | 108 |
| 4.8 | Problems | 109 |
| | References | 109 |

Chapter 5 Vectorial Pulse Width Modulation for Basic Three-Phase Inverters 113

| | | |
|---------|---|-----|
| 5.1 | Review of Space Vector Theory | 113 |
| 5.1.1 | History and Evolution of the Concept | 113 |
| 5.1.2 | Theory: Vectorial Transforms and Advantages | 114 |
| 5.1.2.1 | Clarke Transform | 116 |
| 5.1.2.2 | Park Transform | 117 |
| 5.1.3 | Application to Three-Phase Control Systems | 118 |
| 5.2 | Vectorial Analysis of the Three-Phase Inverter | 119 |
| 5.2.1 | Mathematical Derivation of the Current Space Vector Trajectory in the Complex Plane for Six-Step Operation (with <i>Resistive</i> and <i>Resistive-Inductive</i> Loads) | 119 |
| 5.2.2 | Definition of Flux of a (Voltage) Vector and Ideal Flux Trajectory | 124 |
| 5.3 | SVM Theory: Derivation of the Time Intervals Associated to the Active and Zero States by Averaging | 126 |
| 5.4 | Adaptive SVM: DC Ripple Compensation | 128 |
| 5.5 | Link to Vector Control: Different Forms and Expressions of Time Interval Equations in the (d, q) Coordinate System | 129 |
| 5.6 | Definition of the Switching Reference Function | 132 |
| 5.7 | Definition of the Switching Sequence | 135 |
| 5.7.1 | Continuous Reference Function: Different Methods | 135 |
| 5.7.1.1 | Direct-Inverse SVM | 135 |
| 5.7.2 | Discontinuous Reference Function for Reduced Switching Loss | 138 |

| | | |
|--------|---|-----|
| 5.8 | Comparison between Different Vectorial PWM | 141 |
| 5.8.1 | Loss Performance | 141 |
| 5.8.2 | Comparison of Total Harmonic Distortion/HCF | 141 |
| 5.9 | Overmodulation for SVM | 143 |
| 5.10 | Volt-per-Hertz Control of PWM Inverters | 144 |
| 5.10.1 | Low-Frequencies Operation Mode | 146 |
| 5.10.2 | High-Frequency Operation Mode | 147 |
| 5.11 | Conclusion | 150 |
| 5.12 | Problems | 150 |
| | References | 151 |

Chapter 6 Practical Aspects in Building Three-Phase Power Converters 155

| | | |
|---------|---|-----|
| 6.1 | Selection of the Power Devices in a Three-Phase Inverter | 155 |
| 6.1.1 | Motor Drives | 155 |
| 6.1.1.1 | Load Characteristics | 155 |
| 6.1.1.2 | Maximum Current Available | 155 |
| 6.1.1.3 | Maximum Apparent Power | 155 |
| 6.1.1.4 | Maximum Active (Load) Power | 155 |
| 6.1.2 | Grid Applications | 156 |
| 6.2 | Protection | 156 |
| 6.2.1 | Overshoot | 156 |
| 6.2.2 | Fuses | 159 |
| 6.2.3 | Overtemperature | 162 |
| 6.2.4 | Overshoot | 162 |
| 6.2.5 | Snubber Circuits | 163 |
| 6.2.5.1 | Theory | 163 |
| 6.2.5.2 | Component Selection | 167 |
| 6.2.5.3 | Undeland Snubber Circuit | 168 |
| 6.2.5.4 | Regenerative Snubber Circuits for Very Large Power | 168 |
| 6.2.5.5 | Resonant Snubbers | 169 |
| 6.2.5.6 | Active Snubbing | 172 |
| 6.2.6 | Gate Driver Faults | 173 |
| 6.3 | System Protection Management | 173 |
| 6.4 | Reduction of Common-Mode EMI through Inverter Techniques | 173 |
| 6.5 | Typical Building Structures of Conventional Inverters Depending on Power Level | 177 |
| 6.5.1 | Packages for Power Semiconductor Devices | 177 |
| 6.5.2 | Converter Packaging | 179 |
| 6.6 | Thermal Management | 180 |
| 6.6.1 | Transient Thermal Impedance | 182 |
| 6.7 | Conclusion | 183 |
| 6.8 | Problems | 184 |
| | References | 185 |

| | | |
|------------------|---|-----|
| Chapter 7 | Implementation of Pulse Width Modulation Algorithms | 187 |
| 7.1 | Analog Pulse Width Modulation Controllers | 187 |
| 7.2 | Mixed-Mode Motor Controller ICs | 188 |
| 7.3 | Digital Structures with Counters: FPGA Implementation | 190 |
| 7.3.1 | Principle of Digital PWM Controllers | 190 |
| 7.3.2 | Bus Compatible Digital PWM Interfaces | 192 |
| 7.3.3 | FPGA Implementation of Space Vector Modulation Controllers | 192 |
| 7.3.4 | Deadtime Digital Controllers | 196 |
| 7.4 | Markets for General-Purpose and Dedicated Digital Processors | 197 |
| 7.4.1 | History of Using Microprocessors/Microcontrollers in Power Converter Control | 197 |
| 7.4.2 | DSPs Used in Power Converter Control | 200 |
| 7.4.3 | Parallel Processing in Multi-Processor Structures | 202 |
| 7.5 | Software Implementation in Low-Cost Microcontrollers | 203 |
| 7.5.1 | Software Manipulation of Counter Timing | 203 |
| 7.5.2 | Calculation of Time Interval Constants | 204 |
| 7.6 | Microcontrollers with Power Converter Interfaces | 209 |
| 7.7 | Motor Control Co-Processors | 210 |
| 7.8 | Using the Event Manager within Texas Instrument's DSPs | 210 |
| 7.8.1 | Event Manager Structure | 210 |
| 7.8.2 | Software Implementation of Carrier-Based PWM | 211 |
| 7.8.3 | Software Implementation of SVM | 212 |
| 7.8.4 | Hardware Implementation of SVM | 213 |
| 7.8.5 | Deadtime | 215 |
| 7.8.6 | Individual PWM Channels | 216 |
| 7.9 | Conclusion | 216 |
| | References | 216 |

| | | |
|------------------|---|-----|
| Chapter 8 | Practical Aspects of Implementing Closed-Loop Current Control | 219 |
| 8.1 | Role and Schematics | 219 |
| 8.2 | Current Measurement: Synchronization with Pulse Width Modulation | 219 |
| 8.2.1 | Shunt Resistor | 219 |
| 8.2.2 | Hall-Effect Sensors | 221 |
| 8.2.3 | Current-Sensing Transformer | 222 |
| 8.2.4 | Synchronization with PWM | 222 |
| 8.3 | Current Sampling Rate: Oversampling | 222 |
| 8.4 | Current Control in (a, b, c) Coordinates | 224 |
| 8.5 | Current Transforms (3->2): Software Calculation of Transforms | 225 |
| 8.6 | Current Control in (d, q) Models: PI Calibration | 226 |
| 8.7 | Antiwind-Up Protection: Output Limitation and Range Definition | 228 |

| | | |
|--|---|------------|
| 8.8 | Conclusion | 229 |
| | References | 229 |
| Chapter 9 Resonant Three-Phase Converters | | 231 |
| 9.1 | Reducing Switching Losses through Resonance vs. Advanced Pulse Width Modulation Devices | 231 |
| 9.2 | Do We Still Get Advantages from Resonant High-Power Converters? | 234 |
| 9.3 | Zero Voltage Transition of IGBT Devices | 237 |
| 9.3.1 | Power Semiconductor Devices under Zero Voltage Switching | 237 |
| 9.3.2 | Step-Down Conversion | 240 |
| 9.3.3 | Step-Up Power Transfer | 245 |
| 9.3.4 | Bi-Directional Power Transfer | 247 |
| 9.4 | Zero Current Transition of IGBT Devices | 249 |
| 9.4.1 | Power Semiconductor Devices under Zero Current Switching | 249 |
| 9.4.2 | Step-Down Conversion | 252 |
| 9.4.3 | Step-Up Conversion | 255 |
| 9.5 | Possible Topologies of Quasi-Resonant Converters | 258 |
| 9.5.1 | Pole Voltage | 258 |
| 9.5.2 | Resonant DC Bus | 258 |
| 9.6 | Special PWM for Three-Phase Resonant Converters | 260 |
| 9.7 | Problems | 261 |
| | References | 261 |
| Chapter 10 Component-Minimized Three-Phase Power Converters | | 263 |
| 10.1 | Solutions for Reduction of Number of Components | 263 |
| 10.1.1 | New Inverter Topologies | 263 |
| 10.1.2 | Direct Converters | 267 |
| 10.2 | Generalized Vector Transform | 272 |
| 10.3 | Vectorial Analysis of the B4 Inverter | 276 |
| 10.4 | Definition of PWM Algorithms for the B4 Inverter | 281 |
| 10.4.1 | Method 1 | 281 |
| 10.4.2 | Method 2 | 282 |
| 10.4.3 | Comparative Results | 282 |
| 10.5 | Influence of DC Voltage Variations and Method for Their Compensation | 284 |
| 10.6 | Two-Leg Converter Used in Feeding a Two-Phase Induction Machine | 285 |
| 10.7 | Conclusion | 286 |
| 10.8 | Problems | 287 |
| | References | 287 |

| | | |
|-------------------|--|------------|
| Chapter 11 | AC/DC Grid Interface Based on the Three-Phase Voltage Source Converter | 291 |
| 11.1 | Particularities, Control Objectives, and Active Power Control | 291 |
| 11.2 | PWM in the Control System | 294 |
| 11.2.1 | Single-Switch Applications | 294 |
| 11.2.2 | Six-Switch Converters | 307 |
| 11.3 | Closed-Loop Current Control Methods | 310 |
| 11.3.1 | Introduction | 310 |
| 11.3.2 | PI Current Loop | 311 |
| 11.3.3 | Transient Response Times | 312 |
| 11.3.4 | Limitation of the (v_d, v_q) Voltages | 313 |
| 11.3.5 | Minimum Time Current Control | 314 |
| 11.3.6 | Cross-Coupling Terms | 314 |
| 11.3.7 | Application of the Whole Available Voltage on the <i>d</i> -Axis | 316 |
| 11.3.8 | Switch Table and Hysteresis Control | 318 |
| 11.3.9 | Phase Current Tracking Methods | 319 |
| 11.4 | Grid Synchronization | 325 |
| 11.6 | Problems | 327 |
| | References | 328 |
| Chapter 12 | Parallel and Interleaved Power Converters | 331 |
| 12.1 | Comparison between Converters Built of High-Power Devices and Solutions Based on Multiple Parallel Lower-Power Devices | 331 |
| 12.2 | Hardware Constraints in Paralleling IGBTs | 333 |
| 12.3 | Gate Control Designs for Equal Current Sharing | 338 |
| 12.4 | Advantages and Disadvantages of Paralleling Inverter Legs in Respect to Using Parallel Devices | 338 |
| 12.4.1 | Inter-Phase Reactors | 339 |
| 12.4.2 | Control System | 340 |
| 12.4.3 | Converter Control Solutions | 340 |
| 12.4.4 | Current Control | 342 |
| 12.4.5 | Small-Signal Modeling for (<i>d, q</i>) Control in a Parallel Converter System | 343 |
| 12.4.6 | (<i>d, q</i>) versus (<i>d, q, 0</i>) Control | 346 |
| 12.5 | Interleaved Operation of Power Converters | 347 |
| 12.6 | Circulating Currents | 349 |
| 12.7 | Selection of the PWM Algorithm | 351 |
| 12.8 | System Controller | 352 |
| 12.9 | Conclusion | 354 |

| | |
|----------------------|-----|
| 12.10 Problems | 354 |
| References | 355 |
| Index | 357 |