


# Battery Management Systems

Design by Modelling

by  
Henk Jan Bergveld,  
Wanda S. Kruijt and  
Peter H.L. Notten

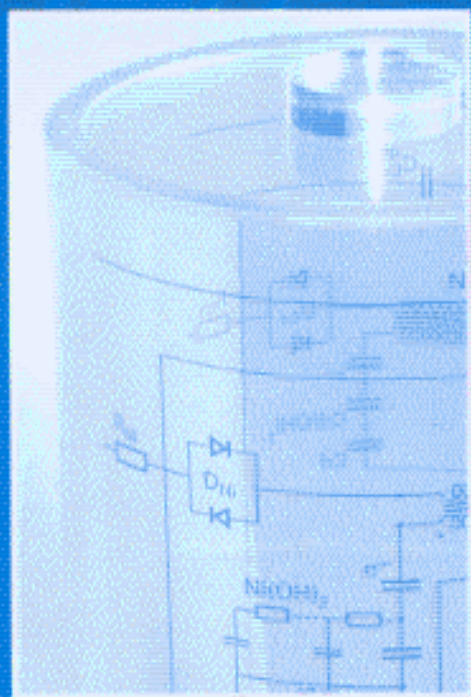

Kluwer Academic Publishers

# Table of contents

<b>List of abbreviations</b>	<b>xiii</b>
<b>List of symbols</b>	<b>xv</b>
<b>Series preface</b>	<b>xxi</b>
<b>Preface</b>	<b>xxiii</b>
<b>1. Introduction</b>	<b>1</b>
1.1 The energy chain	1
1.2 Definition of a Battery Management System	3
1.3 Motivation of the research described in this book	4
1.4 Scope of this book	5
1.5 References	6
<b>2. Battery Management Systems</b>	<b>9</b>
2.1 A general Battery Management System	9
2.2 Battery Management System parts	10
2.2.1 The Power Module (PM)	10
2.2.2 The battery	14
2.2.3 The DC/DC converter	18
2.2.4 The load	19
2.2.5 The communication channel	19
2.3 Examples of Battery Management Systems	22
2.3.1 Introduction	22
2.3.2 Comparison of BMS in a low-end and high-end shaver	22
2.3.3 Comparison of BMS in two types of cellular phones	25
2.4 References	29
<b>3. Basic information on batteries</b>	<b>31</b>
3.1 Historical overview	31
3.2 Battery systems	33
3.2.1 Definitions	33
3.2.2 Battery design	35
3.2.3 Battery characteristics	36

3.3 General operational mechanism of batteries	43
3.3.1 Introduction	43
3.3.2 Basic thermodynamics	44
3.3.3 Kinetic and diffusion overpotentials	45
3.3.4 Double-layer capacitance	50
3.3.5 Battery voltage	52
3.4 References	52

## **4. Battery modelling** **55**

4.1 General approach to modelling batteries	55
4.1.1 Chemical and electrochemical potential	58
4.1.2 Modelling chemical and electrochemical reactions	59
4.1.3 Modelling mass transport	67
4.1.4 Modelling thermal behaviour	82
4.2 A simulation model of a rechargeable NiCd battery	86
4.2.1 Introduction	86
4.2.2 The nickel reaction	89
4.2.3 The cadmium reactions	92
4.2.4 The oxygen reactions	97
4.2.5 Temperature dependence of the reactions	102
4.2.6 The model	103
4.3 A simulation model of a rechargeable Li-ion battery	107
4.3.1 Introduction	107
4.3.2 The $\text{LiCoO}_2$ electrode reaction	108
4.3.3 The $\text{LiC}_6$ electrode reaction	113
4.3.4 The electrolyte solution	117
4.3.5 Temperature dependence of the reactions	118
4.3.6 The model	118
4.4 Parameterization of the NiCd battery model	124
4.4.1 Introduction	124
4.4.2 Mathematical parameter optimization	126
4.4.3 Results and discussion	131
4.4.4 Quality of the parameter set presented in section 4.4.3 under different charging conditions	138
4.4.5 Results obtained with a modified NiCd battery model and discussion	144
4.5 Simulation examples	149
4.5.1 Simulations using the NiCd model presented in section 4.2	149
4.5.2 Simulations using the Li-ion model presented in section 4.3	155
4.6 Conclusions	162
4.7 References	165

<b>5. Battery charging algorithms</b>	<b>169</b>
5.1 Charging algorithms for NiCd and NiMH batteries	169
5.1.1 Charging modes, end-of-charge triggers and charger features	169
5.1.2 Differences between charging algorithms for NiCd and NiMH batteries	175
5.1.3 Simulation example: an alternative charging algorithm for NiCd batteries	177
5.2 Charging algorithm for Li-ion batteries	184
5.2.1 The basic principle	184
5.2.2 The influence of charge voltage on the charging process	186
5.2.3 The influence of charge current on the charging process	187
5.2.4 Simulation example: fast charging of a Li-ion battery	188
5.3 Conclusions	191
5.4 References	192
 <b>6. Battery State-of-Charge indication</b>	 <b>193</b>
6.1 Possible State-of-Charge indication methods	193
6.1.1 Definitions	193
6.1.2 Direct measurements	195
6.1.3 Book-keeping systems	199
6.1.4 Adaptive systems	202
6.1.5 Some remarks on accuracy and reliability	203
6.2 Experimental tests using the bq2050	204
6.2.1 Operation of the bq2050	204
6.2.2 Set-up of the experiments	206
6.2.3 Results and discussion	208
6.2.4 Conclusions of the experiments	211
6.3 Direct measurements for Li-ion batteries: the EMF method	212
6.3.1 Introduction	212
6.3.2 EMF measurement methods	212
6.3.3 Measured and simulated EMF curves for the CGR17500 Li-ion battery	214
6.3.4 Conclusions	219
6.4 A simple mathematical model for overpotential description	219
6.5 Proposed set-up for State-of-Charge system	225
6.5.1 The algorithm	225
6.5.2 Comparison with the bq2050 system	229
6.5.3 Comparison with systems found in the literature	230

6.6	Experimental tests with the system proposed in section 6.5	231
6.6.1	Introduction	231
6.6.2	Set-up of the experiments	231
6.6.3	Experimental results	232
6.6.4	Discussion of the results	235
6.6.5	Conclusions of the experiments	237
6.7	Conclusions	238
6.8	References	239

## **7. Optimum supply strategies for Power Amplifiers in cellular phones 241**

7.1	Trends in cellular systems	241
7.2	The efficiency control concept	245
7.2.1	Basic information on Power Amplifiers	246
7.2.2	Optimum supply voltage for optimum efficiency	250
7.3	DC/DC conversion principles	251
7.3.1	Linear voltage regulators	252
7.3.2	Capacitive voltage converters	253
7.3.3	Inductive voltage converters	255
7.3.4	EMI problems involved in capacitive and inductive voltage converters	258
7.3.5	Inductive voltage conversion for efficiency control	258
7.4	Simulation model derivation	258
7.4.1	DC/DC down-converter	258
7.4.2	Power Amplifier	260
7.5	Theoretical benefits of efficiency control	261
7.5.1	Simulation set-up	262
7.5.2	Results and discussion	263
7.5.3	Conclusions	265
7.6	Experimental results obtained with a CDMA PA	266
7.6.1	Measurement set-up	266
7.6.2	Measurement results and discussion of part 1: no DC/DC converter	267
7.6.3	Measurement results and discussion of part 2: with DC/DC converter	269
7.6.4	Estimation of talk time increase in a complete CDMA cellular phone	271
7.7	Application of efficiency control in a GSM cellular phone	274
7.7.1	GSM power control protocol	274
7.7.2	Modifications in the Spark GSM phone	276
7.7.3	Measurement results and discussion	279
7.7.4	Conclusions of the experiments	281
7.8	Conclusions	281
7.9	References	282

<b>8. General conclusions</b>	<b>285</b>
<b>About the authors</b>	<b>289</b>
<b>Index</b>	<b>291</b>